

ALUPLAST window sill connection profile

The window sill connection profile is suitable for 5 chamber **Aluplast** window profiles **Ideal 4000**, **Ideal 5000** and **Ideal 6000**.


The window sill connection profile has excellent thermal insulation properties which are improved by heat-insulating seal made of soft PVC.

ELMONT NB, s.r.o. window sill connection profiles are sufficiently thick-walled. That is the reason they do not crack and can withstand even greater load.

Our window sill connection profiles also include an attachment for a windowsill.

This window sill connection profile meets current requirements of standards related to energy efficiency.

Figure:

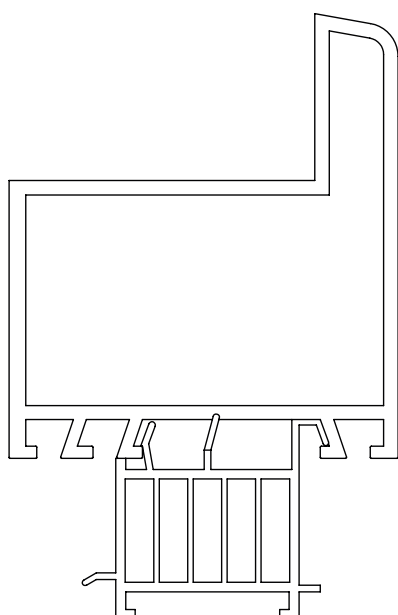

Delivery date	7 days after ordering
Application	Aluplast window sill connection profile is a product suitable for panel, brick apartment houses, office buildings and family houses
Number of chambers in window profile	window sill connection profile intended for 5 chamber Aluplast window profile
Profile thickness	20,6 mm
Profile width	42,8 mm
Profile wall width	1,7 mm
Number of chambers in window sill connection profile	5 chambers
Material	stabilized hard PVC from recycled Aluplast profiles
Weight	0,45 kg/m
Profile length	the basic length of the profile bar 6,5 m (on request 6 m)
Quantity	216 pcss/palette, 1404 rm
Colour	grey

