

INOUTIC PRESTIGE window sill connection profile

The window sill connection profile is suitable for **6 chamber** Deceuninck Inoutic **Prestige** window profiles.

The window sill connection profile has excellent thermal insulation properties which are improved by heat-insulating seal made of soft PVC.


ELMONT NB, s.r.o. window sill connection profiles are sufficiently thick-walled. That is the reason they do not crack and can withstand even greater load.

Our window sill connection profiles also include an attachment for a windowsill.

This window sill connection profile meets current requirements of standards related to energy efficiency.



Figure:

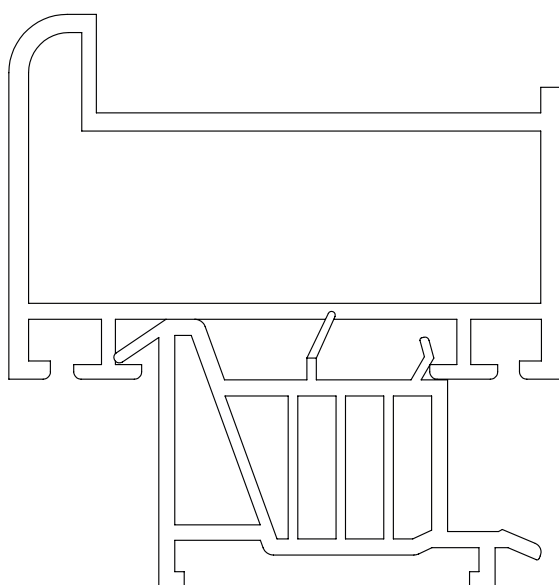

Delivery date	7 days after ordering
Application	Deceuninck Inoutic Prestige window sill connection profile is a product suitable for panel, brick apartment houses and family houses for a more demanding customer
Number of chambers in window profile	window sill connection profile intended for 6 chamber Deceuninck Inoutic Prestige window profile
Profile thickness	36,8 mm
Profile width	52,4 mm
Profile wall width	2,2 mm
Number of chambers in window sill connection profile	5 chambers
Material	stabilized hard PVC from recycled Inoutic profiles
Weight	0,70 kg/m
Profile length	the basic length of the profile bar 6.5 m (on request 6 m)
Quantity	180 pcs/palette, 1170 rm
Colour	grey

