

INOUTIC ARCADE window sill connection profile

The window sill connection profile is suitable for **5 chamber Deceuninck Inoutic Arcade** window profiles.


The window sill connection profile has excellent thermal insulation properties which are improved by heat-insulating seal made of soft PVC.

ELMONT NB, s.r.o. window sill connection profiles are sufficiently thick-walled. That is the reason they do not crack and can withstand even greater load.

Our window sill connection profiles also include an attachment for a windowsill.

This window sill connection profile meets current requirements of standards related to energy efficiency.

Figure:

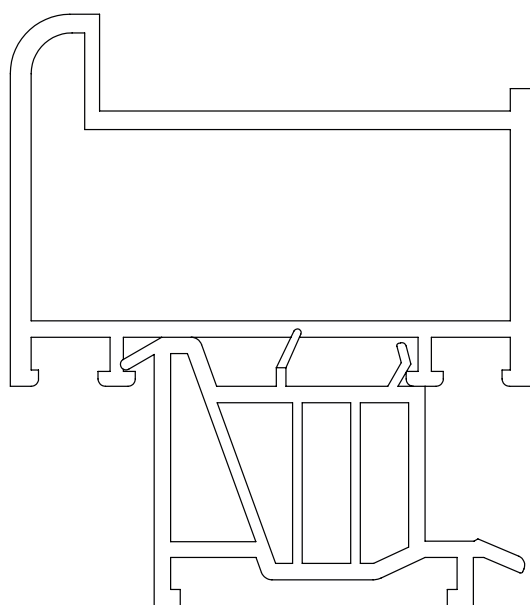

Delivery date	7 days after ordering
Application	Deceuninck Inoutic Arcade window sill connection profile is an economic product suitable for panel, brick apartment houses, office buildings and family houses
Number of chambers in window profile	window sill connection profile intended for 5 chamber Deceuninck Inoutic Arcade window profile
Profile thickness	36,1 mm
Profile width	49,8 mm
Profile wall width	2,2 mm
Number of chambers in window sill connection profile	4 chambers
Material	stabilized hard PVC from recycled Inoutic profiles
Weight	0.55 kg/m
Profile length	the basic length of the profile bar 6.5 m (on request 6 m)
Quantity	180 pcs/palette, 1170 m
Colour	grey

